

# OUR LUBRICANTS KEEP THE WORLD MOVING



For more than 80 years, we have been concentrating all our activities and research efforts on the development of innovative lubricants.

Today, FUCHS is a company that offers premium quality lubricants and associated specialties worldwide in all applications.



- Premium Quality Products
- OEM Approved
- UK Manufacturing Facility
- UK Warehousing
- UK Customer Services
- UK Technical Support
- Local Representation
- World Wide Resources
- XTL® Technology
- Biodegradable Lubricants
- Energy Efficient Products
- Diverse Product Range

## Innovative lubricants need experienced application engineers

Every lubricant change should be preceded by expert consultation on the application in question. Only then can the best lubricant system be selected. We will be glad to advise on the right lubrication for each application and also the range of support services we can offer.



FUCHS Lubricants



## Lubricant Solutions for the Fork Lift Handling Industry

Contact:

**FUCHS LUBRICANTS (UK) PLC**  
New Century Street, Hanley,  
Stoke-on-Trent,  
ST1 5HU  
Phone: +44 (0) 1782 203700  
E-mail: [contact-uk@fuchs-oil.com](mailto:contact-uk@fuchs-oil.com)  
[www.fuchslubricants.com](http://www.fuchslubricants.com)

0814

LUBRICANTS.  
TECHNOLOGY.  
PEOPLE.




# All-round protection for your machinery.

Lubricants can have a huge impact on the operation of your business.

Choosing, using and managing them correctly can bring significant rewards in terms of improved efficiency and profitability.

FUCHS offer an exceptional choice of oils and greases - our high quality products are designed to cover every application.

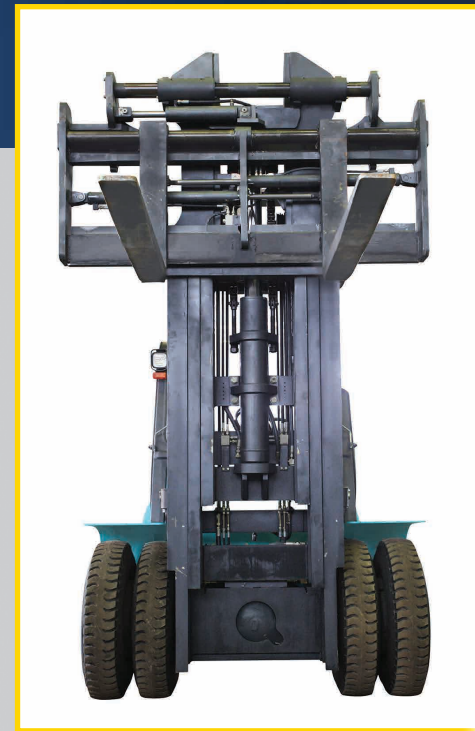

## ENGINE OILS

### Specifications / Approvals

<b>TITAN TRUCK PLUS SAE 15W-40</b>	Super High Performance oil for a variety of diesel and gasoline engines. Specially for highly-loaded commercial vehicle diesel engines. Lower oil consumption.	ACEA E7, API CI-4/SL GLOBAL DHD-1 CAT ECF-1a/ECF-2 CUMMINS CES 20076/7/8 DEUTZ DQC III-10 MACK EO-N MAN M 3275-1	MB-APPROVAL 228.3 MTU DDC TYPE-2 RENAULT RLD / RLD-2 VOLVO VDS-3
<b>AGRIFARM STOU SAE 15W-30</b>	A high performance multifunctional oil. The product has been developed using modern additive technology providing universal lubrication of diesel engines, transmissions and hydraulics.	API CF-4 / SF API GL-4	
<b>TITAN GT1 PRO C-3 SAE 5W-30</b>	A premium engine oil, utilising the new XTL-Technology® which offers high performance over a range of temperatures. The unique lubrication properties of XTL-Technology® offer significant fuel economy and wear protection benefits in highly stressed engines.	BMW LONGLIFE-04 MB-APPROVAL 229.51	PORSCHE C30 VW 504 00 / 507 00

## HYDRAULIC OILS

### Specifications / Approvals

<b>RENOLIN B-HVI SERIES 32 HVI 46 HVI 68 HVI</b>	High quality lubricating and hydraulic oils for various applications where high viscosity index and good load carrying capacity are required. <b>Especially recommended where a low start-up viscosity at low temperatures and high viscosity at high temperatures is required.</b>	The products meet or exceed the requirements according to: DIN 51 524-3, HVLP ISO 6743-4, HV DENISON HF 0 BOSCH REXROTH VICKERS US STEEL CINCINNATI MILACRON	
<b>RENOLIN MR310</b>	Multipurpose oils for bearings, transmissions and hydraulic systems, with excellent viscosity-temperature behaviour. Recommended for use in <b>cold temperature storage</b> where machines and components are exposed to changing temperatures, operated at low temperatures or when they are sensitive to variations in viscosity.	The products fulfil and surpass the specifications: DIN 51 524-3, HVLP (D) ISO 6743-4, HV (with detergent/dispersant properties) ISO 11158: HR (with detergent/dispersant properties)	

## AUTOMATIC TRANSMISSION FLUIDS

### Specifications / Approvals

<b>TITAN ATF 4000</b>	Ultra High Performance multi-functional ATF for use in automatic transmissions as well as other ATF applications. Licensed according to DEXRON III (H). Improved low-temperature shifting compared to DEXRON II.	ALLISON C-4 ALLISON TES 389 DEXRON III (H) MAN 339 TYPE V1 MAN 339 TYPE Z1 MB-APPROVAL 236.1	MB-APPROVAL 236.9 VOITH H55.6335.XX (G 607) VOLVO 97341 ZF TE-ML 04D, 14A, 17C
<b>TITAN ATF 3000</b>	Super High Performance DEXRON II (D) ATF for all automatic transmissions in commercial vehicles, machinery and passenger cars according to manufacturer's documentation.	MAN 339 TYPE V1 MAN 339 TYPE Z1 MB-APPROVAL 236.1 VOITH H55.6335.XXX (G 607) ZF TE-ML 02F, 03D, 04D, 14A, 17C	

## GEAR OILS

### Specifications / Approvals

<b>TITAN GEAR HYP SAE 90</b>	High Performance gear oil for highly-stressed differentials in commercial vehicles and passenger cars.	API GL-5 MAN 342 TYPE M1 MB-APPROVAL 235.0 ZF TE-ML, 16C, 17B, 19B, 21A
<b>TITAN GEAR LS SAE 90</b>	High Performance LS (Limited Slip) hypoid gear oil for axles in commercial vehicles and passenger cars with or without limited slip differentials.	API GL-5 ZF TE-ML 05C, 12C, 16E, 21C
<b>TITAN CYTRAC MB SYNTH SAE 75W-90</b>	A fully-synthetic, fuel-economy manual transmission oil for extended drain intervals in commercial vehicles, specially developed for Mercedes-Benz Actros vehicles.	API GL-4 MAN 341 TYPE MB MB-APPROVAL 235.11

## WHEEL BEARINGS

### Specifications / Approvals

<b>RENOLIT LX-EP2</b>	A premium long-life lithium complex grease. Particularly recommended for use at elevated temperatures.	Approved to Ford Motor Co. specifications WSD-M1C-228A and SAM 1C 9111A. Approved to Leyland Bus specification GX
-----------------------	--	--

## ANTI-FREEZE / DIESEL ADDITIVES

### Specifications / Approvals

<b>MAINTAIN FRICOFIN LL</b>	Coolant additive based on monoethylene glycol. Free from nitrite, amine, phosphate and silicates.	ASTM D 3306, D 4985 BS 6580:2010 DAF 74002 DEUTZ TR 0199-99-1115 MAN 324 SNF MB-APPROVAL 325.3	KSM 2142 FORD WSS-M97-B44-D MWM TR0199-99-2091 BEZ.REG. ARNSBG E62.12.22.64-2011-1
<b>MAINTAIN FRICOFIN ESK</b>	Versatile MEG anti-freeze suitable for all-year round use.	ASTM D4985 BS 6580: 2010	
<b>MAINTAIN FRICOFIN DP</b>	Coolant concentrate based on mono ethylene glycol. It is free of nitrite, amine and phosphate. MAINTAIN FRICOFIN DP fulfils the requirements of the latest VW coolant additive specification TL 774-G.	ASTM D 3306 ASTM D 4985 ASTM D 6210 MAN 324 Type Si-OAT MB-APPROVAL 325.5	BS 6580 AFNOR NF R 15-601 CUMMINS CE514603 MB-APPROVAL 325.6

## AEROSOLS

<b>FLT LUBE</b>	FUCHS FLT LUBE AEROSOL provides a thin film, heavy duty lubricant for the protection of leaf and roller chains on all types of lift truck. The lubricant itself incorporates a penetrative solvent carrier to ensure effective penetration of the liquid and solid lubricants into pins and bushes to ensure transport to potential wear sites and therefore to assist protection, even under conditions of shock loading. It also offers good dewatering properties and protects against corrosion.
-----------------	--

<b>CHAIN LUBE</b>	Contains a high viscosity lubricating base oil along with extreme pressure and anti-wear additives for superb chain protection. Penetrates pins and bushes, reduces chain wear, provides excellent corrosion protection, reduces friction and power requirements.
-------------------	---